



ADVANCED FOOD SAFETY OZONE SANITATION SOLUTIONS

Designed for Hospitality and Foodservice Excellence

NOx
Free

Not Harmful
Not Corrosive



Clean &
Effective



Reduce
Chemical Use



Higher
Productivity

Designed to Exceed Hygiene Standards

Professional Ozone Solutions for Safer HORECA


For over 30 years, BioSure Professional has been a pioneering industry leader in the development, manufacturing, and supply of environmentally-friendly microbial controls and sanitation systems that harness electrolytic ozone generated from water and electricity. Our extensive expertise in aqueous ozone equipment manufacturing has enabled us to introduce innovative ozone sanitation products specifically designed for the Food and Beverage (F&B) industry, thereby enhancing food safety and beverage quality for operators worldwide.

Safe and Sustainable Food Safety and Sanitation

At BioSure Professional, we understand the critical importance of maintaining hygienic conditions in the HORECA (Hotel, Restaurant, and Catering) sector. To address this, we have harnessed the potent and natural disinfecting power of ozone, creating effective and sustainable sanitation solutions for various applications within the Food and Beverage (F&B) industry. Our unwavering commitment to food safety and sanitation drives our provision of pioneering, secure, and reliable ozone products, complemented by comprehensive solutions tailored to uphold the industry's utmost standards of food safety and sanitation.

Ozone is one of the strongest naturally occurring oxidants and is highly effective in killing bacteria, viruses, and other harmful microorganisms. Our patented Electrolytic Ozone Generation (EOG) technologies deliver easy-to-use, effectively dissolved ozone in water safely and reliably without using harmful chemicals that can alter tastes. And, unlike traditional sanitizers, ozone reverts to oxygen after use, leaving no harmful residues or by-products.

Our cutting-edge sanitation technology offers specialized applications for various types and stages of food handling or processing, including water disinfection, produce wash, beverage waterlines hygiene maintenance, ice machine hygiene maintenance, and hygiene improvement. With our comprehensive solutions, F&B operators can improve food safety, reduce chemical usage, minimize downtime, and surpass regulatory standards.

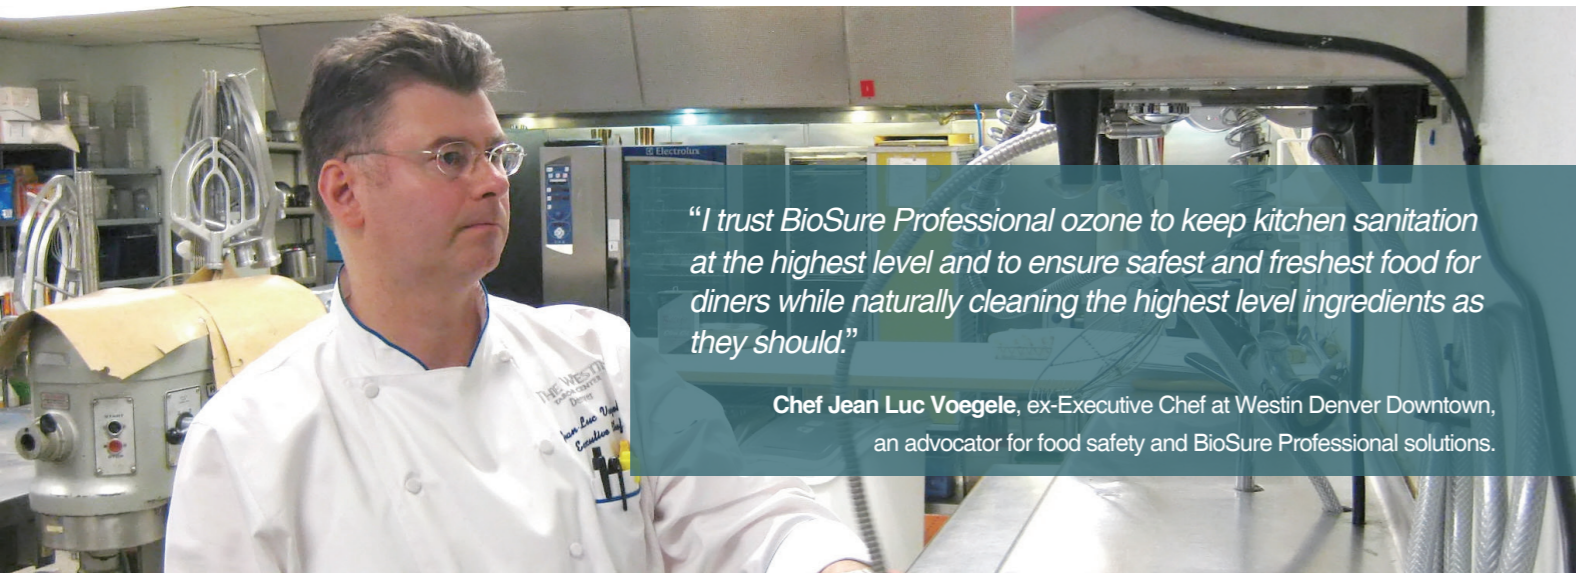


"I trust BioSure Professional ozone to keep kitchen sanitation at the highest level and to ensure safest and freshest food for diners while naturally cleaning the highest level ingredients as they should."

Chef Jean Luc Voegele, ex-Executive Chef at Westin Denver Downtown, an advocator for food safety and BioSure Professional solutions.



Kitchen Food Handling

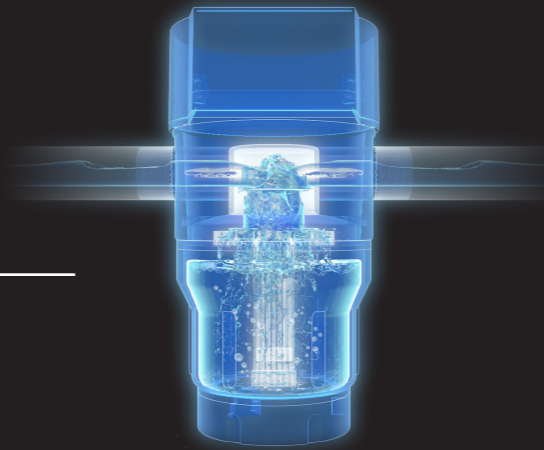

- ✓ Surface sanitation
- ✓ Increases productivity
- ✓ Food sanitation
- ✓ Reduce bacterial counts
- ✓ Organic wash
- ✓ Reduces chemical use
- ✓ Reduces corporate carbon footprint

The use of ozone as an antimicrobial agent for food processing and agricultural production is recognized by the US FDA. Aqueous ozone, the technology used in BioSure Professional WDS Series, is acknowledged as an organic wash practice. The BioSure Professional WDS Series converts tap water into aqueous ozone directly, providing a safe and residue-free sanitation method that doesn't affect the taste or texture of food.

With the BioSure Professional WDS Series, food processing and kitchen operators can maintain high food safety standards and reduce operational costs associated with traditional sanitation methods. These solutions offer a safe and effective alternative that eliminates the need for harmful chemicals and leaves no residue. You can trust BioSure Professional to properly and safely sanitize your food while reducing your operational costs.



WDS3000X

MODEL: EOS7177-PQX

■ Up to 2.5 ppm



WDS6000X

MODEL: EOS7178-PQX

■ Up to 3.0 ppm



- Personal Hygiene
- Food Purification
- Utensil Sanitation
- Equipment Integration
- Sanitary Washdown
- Hygienic Defrosting
- Odor Control

- Electrolytic Ozone Generation (EOG) technology.
- Large flow capability.
- Easy in-line installation.
- User-friendly display and controls.
- Simple flow-start design.
- Intelligent self-booster program.
- Replaceable EOG Cell Cartridge.
- Smart self-cleaning maintenance program.


Beer Line Cleaning and Hygiene



The WDS3000X can also be used as an automated cleaning and sanitation system for beer lines. Just connect it to a regular tap water supply, and it produces highly effective ozone water for beer line sanitation. The WDS3000X is safe and efficient, providing an easy way to keep beer lines clean and improve hygiene protocols and maintain the highest quality taste without fear of using dangerous caustic chemicals.

By investing in the WDS3000X, you can save time and effort in maintaining beer lines, while keeping up with the latest hygiene standards. Trust BioSure Professional to provide reliable and efficient solutions for your business.

- ✓ Maximizes keg yield
- ✓ Improves hygiene and health
- ✓ Maintains beer quality
- ✓ Reduces beer wastage
- ✓ Saves money and time

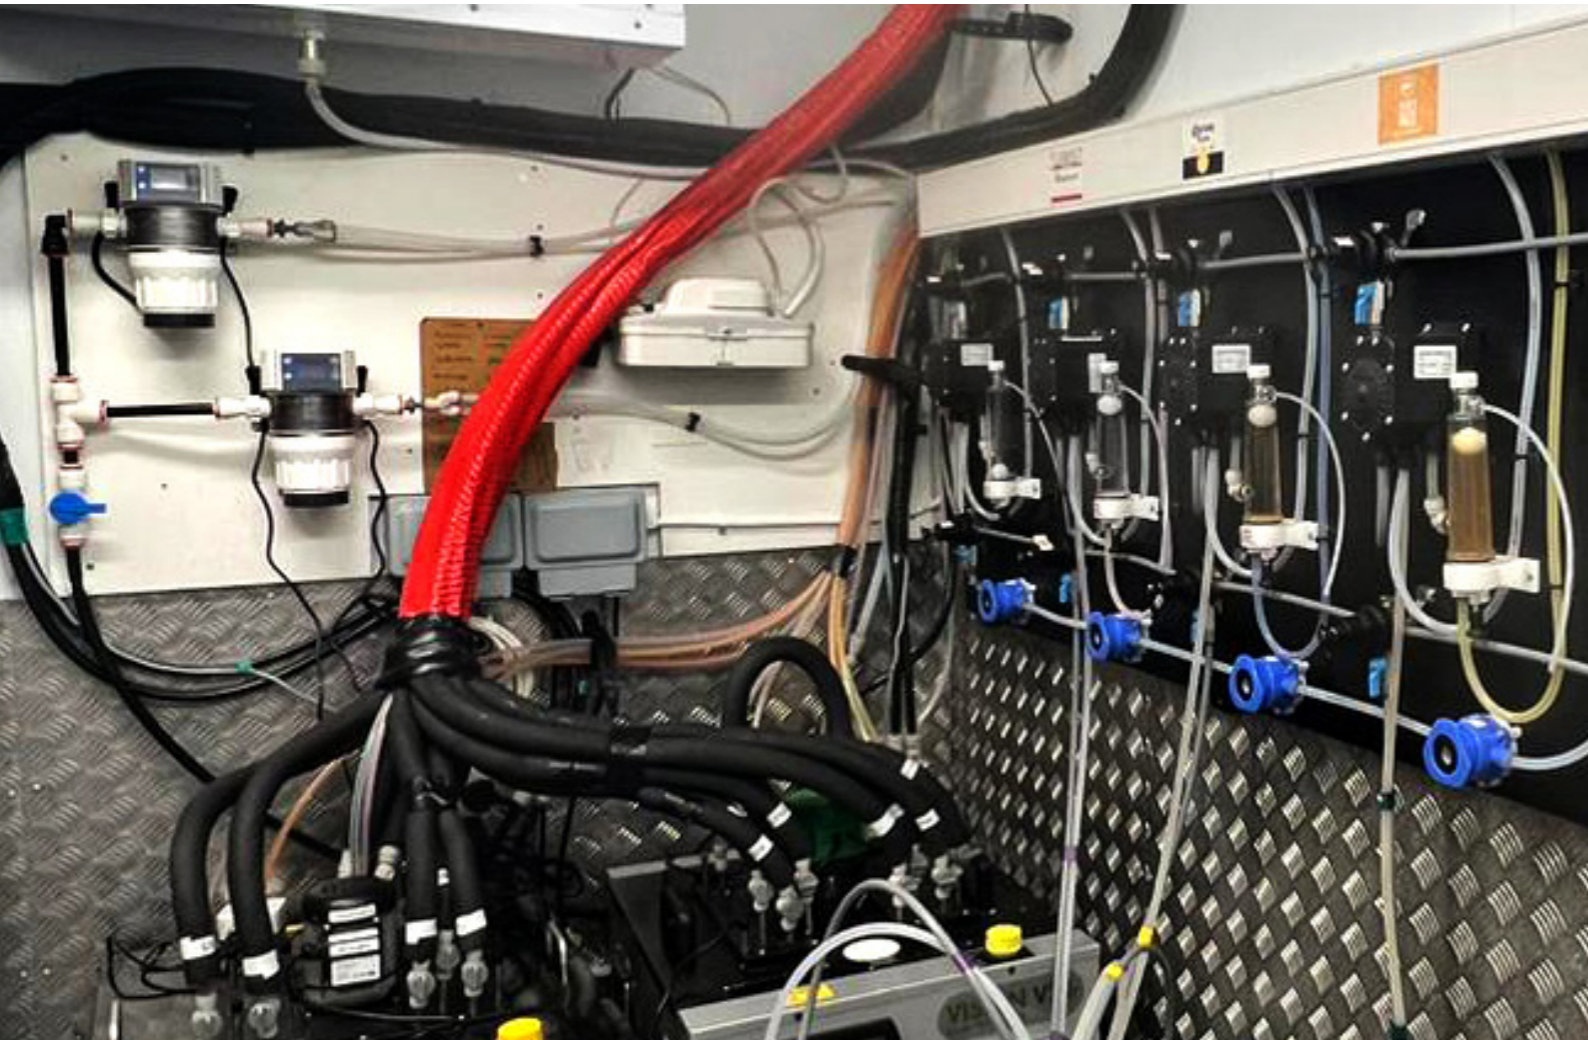

Ice and Beverage Waterlines

- ✓ Waterline biofilm preventive maintenance
- ✓ Reduces personnel maintenance requirements
- ✓ Maintains ice hygiene and quality 24/7
- ✓ Improves equipment performance
- ✓ Saves costs and energy
- ✓ Enhances customer satisfaction

WDS600X

MODEL: EOS7210-BX

■ Up to 1.0 ppm



- Reduce maintenance cost
- Ice maker compatible
- In-line & in-water sanitation

WDS1200X

MODEL: EOS7211-BX

■ Up to 1.5 ppm



- Automatic & Continuous
- Safe dose for equipment
- No taste change in produced ice



Portable Ozone Solution

Simple innovation, naturally add a level of hygiene control


BioSure Professional Ozone Spray Bottle is designed as an environmentally-friendly alternative sanitizer spray for general surfaces. The OSB uses breakthrough innovative technology which enables concentrated aqueous ozone to be generated directly in water. It is then ready for use as a surface sprayer to reduce pathogens.



Professional Ozone Spray Bottle


MODEL: EOS7161-P

- Only need tap water
- USB-C rechargeable
- 99.9% of bacteria kill in 5 sec
- Water based powerful oxidant sanitizer
- 10,500 bottles of operation service life

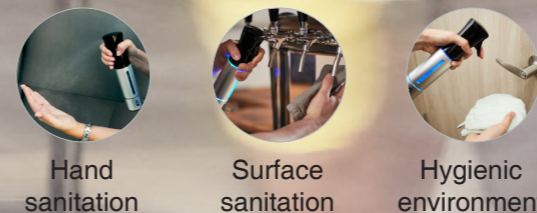


SPECIFICATIONS


WDS600X Water Disinfection System

 <p>Application Capacity Up to 900 lbs/day (daily ice production)</p>	EOS7210-BX	Dimensions (W x D x H)	73 x 118 x 131 mm (2.8"x 4.6"x 5.1")
	Weight (Net)	394 g (0.87 lb)	
	Power Supply	100 -240V AC, 50/60Hz (24V DC, 1.0A)	
	Rated Power	15W	
	Waterline Connection	1/2"	
	Operating Water Requirements	Cold Clean Tap Water (Filtered to $\leq 1 \mu\text{m}$, TDS > 30 ppm, Hardness <250 ppm)	
	Nominal Operating Flowrate	60 - 880 LPH (0.3 - 3.9 GPM)	
	Aqueous O ₃ Concentration	Up to 1.0 ppm @60LPH*3*4	


WDS1200X Water Disinfection System

 <p>Application Capacity Up to 1800 lbs/day (daily ice production)</p>	EOS7211-BX	Dimensions (W x D x H)	73 x 118 x 148 mm (2.8"x 4.6"x 5.8")
	Weight (Net)	500 g (1.1 lb)	
	Power Supply	100 -240V AC, 50/60Hz (24V DC, 4.0A)	
	Rated Power	30W	
	Waterline Connection	1/2"	
	Operating Water Requirements	Cold Clean Tap Water (Filtered to $\leq 1 \mu\text{m}$, TDS*1 > 30 ppm, Hardness*2 <250 ppm)	
	Nominal Operating Flowrate	60 - 880 LPH (0.3 - 3.9 GPM)	
	Aqueous O ₃ Concentration	Up to 1.5 ppm @ 60 LPH*3*4	


WDS3000X Water Disinfection System

	EOS7177-PQX	Dimensions (W x D x H)	140 x 128.5 x 210.5 mm (5.5"x 5.1"x 8.2")
	Weight (Net)	1.3 kg (2.9 lb)	
	Power Supply	100 -240V AC, 50/60Hz (24V DC, 4.0A)	
	Rated Power	96W	
	Waterline Connection	3/4"	
	Operating Water Requirements	Cold Clean Tap Water (Filtered to $\leq 1 \mu\text{m}$, TDS > 30 ppm, Hardness <250 ppm)	
	Nominal Operating Flowrate	80 - 2000 LPH (0.4 - 9.0 GPM)	
	Aqueous O ₃ Concentration	Up to 2.5 ppm @ 80 LPH*3	

WDS6000X Water Disinfection System

	EOS7178-PQX	Dimensions (W x D x H)	168 x 146.5 x 273.9 mm (6.6"x 5.7"x 10.8")
	Weight (Net)	3.0 kg (6.6 lb)	
	Power Supply	100 -240V AC, 50/60Hz (15V DC, 10.5A)	
	Rated Power	96W	
	Waterline Connection	1"	
	Operating Water Requirements	Cold Clean Tap Water (Filtered to $\leq 1 \mu\text{m}$, TDS > 30 ppm, Hardness <250 ppm)	
	Nominal Operating Flowrate	200 - 4000 LPH (0.9 - 18.0 GPM)	
	Aqueous O ₃ Concentration	Up to 3.0 ppm @ 200 LPH*3	

OSB Professional Ozone Spray Bottle

 <p>150ml</p>	EOS7161-P	Dimensions (D x H)	255 mm (10") Height 53 mm (2.1") Diameter
	Weight (Net)	308 g (0.7 lb)	
	Power Supply	5V DC, 1.0A (USB-C)	
	Battery Capacity	Li-ion 3.7V, 1200mAh	
	Operating Water Requirements	Cold Clean Tap Water (TDS > 30 ppm, Hardness < 180 ppm)	
	Bottle Water Volume	Max. 150 ml (5 oz)	
	Aqueous O ₃ Concentration	Up to 3.0 ppm*3	

- *1. TDS: Total Dissolved Solids is the total amount of solids dissolved in the water. Its concentration will affect the conductivity of water.
- *2. Hardness: Water hardness as CaCO₃ level in water, expressed in ppm.
- *3. The TDS in water is associated with the conductivity in water, which in turn affects the performance of directelectrolytic aqueous ozone generation process. Minimum TDS > 30 ppm is required for getting the basic performance for BioSure Professional products that is developed with direct-electrolytic aqueous ozone technology. For best performance, for the type of products, TDS > 60 is recommended for the water used.
- *4. Typically, the water basin of ice machines with a capacity of up to 1800lbs contains a residual amount of dissolved ozone of around 0.05 parts per million (ppm) under general conditions. However, the actual performance may vary depending on factors such as flow conditions, temperature, and influent water quality. The standard test conditions for this measurement are an input water pressure of 1.5 kg/cm² (20 psi), a temperature of 25°C (77°F), and a total dissolved solids (TDS) level of 60 ppm.




BioSure

PROFESSIONAL

CLEAN · SAFE · OZONE

About Us

BES Group has been the world leader in electrolytic technology since 1988, providing products that convert water to ultra-pure ozone and hydrogen. These products are widely used across a range of industries, including food safety, ice and beverage, dentistry, healthcare, professional laundry, professional cleaning, maritime, and home sanitation and wellness. BES Group products are rigorously tested for high performance, safety, efficacy, and reliability, and have received certifications from government agencies and leading third-party laboratories. Customers can be assured that all components and products meet the highest quality standards.

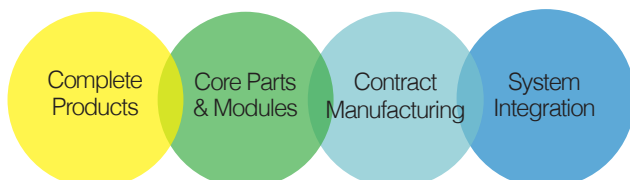

North America

BIOSURE North America, LLC.
2020 Babcock Rd., Ste. 25
San Antonio, Texas 78229 USA
www.biosureozone.com

Oceania

BES GROUP (AUST) PTY Ltd.
Ground Floor, 737 Burwood Rd,
Hawthorn, VIC 3122 Australia
www.besgroups.com.au

Thailand

BES GROUP THAILAND
2, 4 Soi Ngamwongwan 25
Intersection 28, Nonthaburi
www.besgroupthailand.com

Malaysia

BES Network (M) Sdn Bhd
E2-02-01, Block E2, Sunway Geo Avenue,
47500 Subang Jaya, Selangor D.E., Malaysia
www.biosureozone.asia



United Kingdom

Biotek Environmental Science UK Ltd
61 Napier Rd, Cumbernauld
G68 0EF, United Kingdom
www.biosureozone.com.uk

China

Shanghai Zhongte Environmental Technology Co., LTD
Unit 205, 998 Shenbin South Road, Minhang District,
Shanghai, 201106 China
www.biosurepro.com

Headquarters/Asia/Taiwan

Biotek Environmental Science Ltd.
5F, 98 Xingde Rd, Sanchung Dist,
New Taipei, 24158 Taiwan
www.besgroups.com

Factory ISO 9001 Certified
Yantai United Ozonetec Corporation.
4F, 1 Wuzhishan Rd, ETDZ
Yantai, Shandong 264006 China
www.besgroup.com.cn